
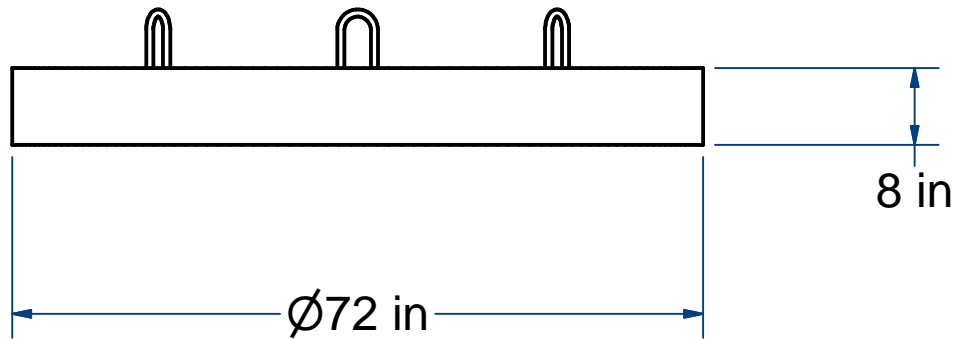


# ACME-SHOREY

PRECAST CONCRETE PRODUCTS

## NOTES:

- 1.) OPTIONAL: Ø24" ACCESS COVER
- 2.) USE W/6'O.D. LEACHING PITS.

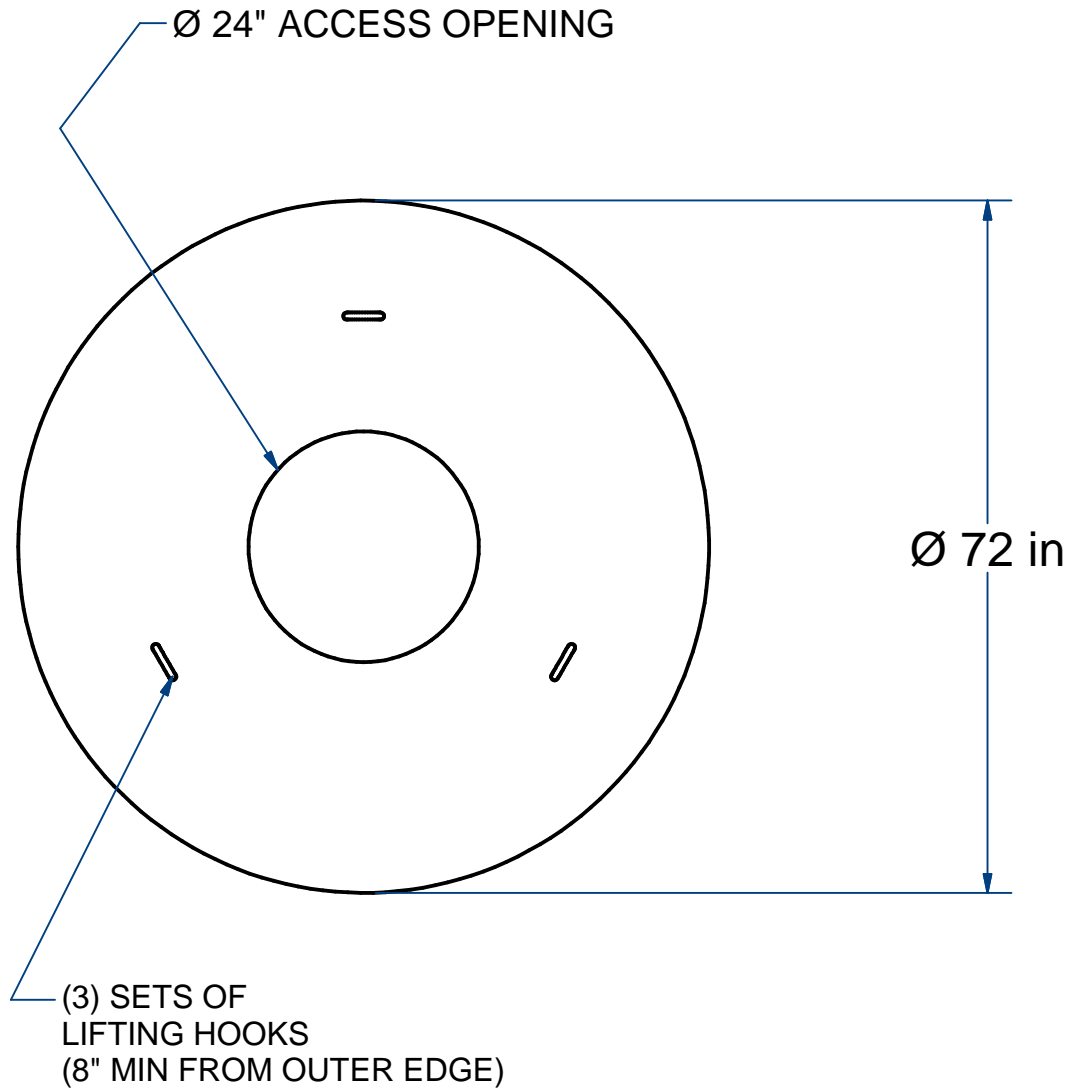

**NAME: SLAB COVER, 6'DIA**

**H-20**

**ITEM# C6**

Concrete Minimum Strength: 5,000 p.s.i. at 28 days  
 Steel Reinforcement: ASTM A615, Grade 60  
 Design Loading: standard units - AASHTO - H20

WEIGHT 2,520 Lbs

CH

DATE: 11-23-2019

Ch 12 Pg 9.1 Sht 1