


NOTES:

1.) COMPLIES TO CODE 310 CMR15.232

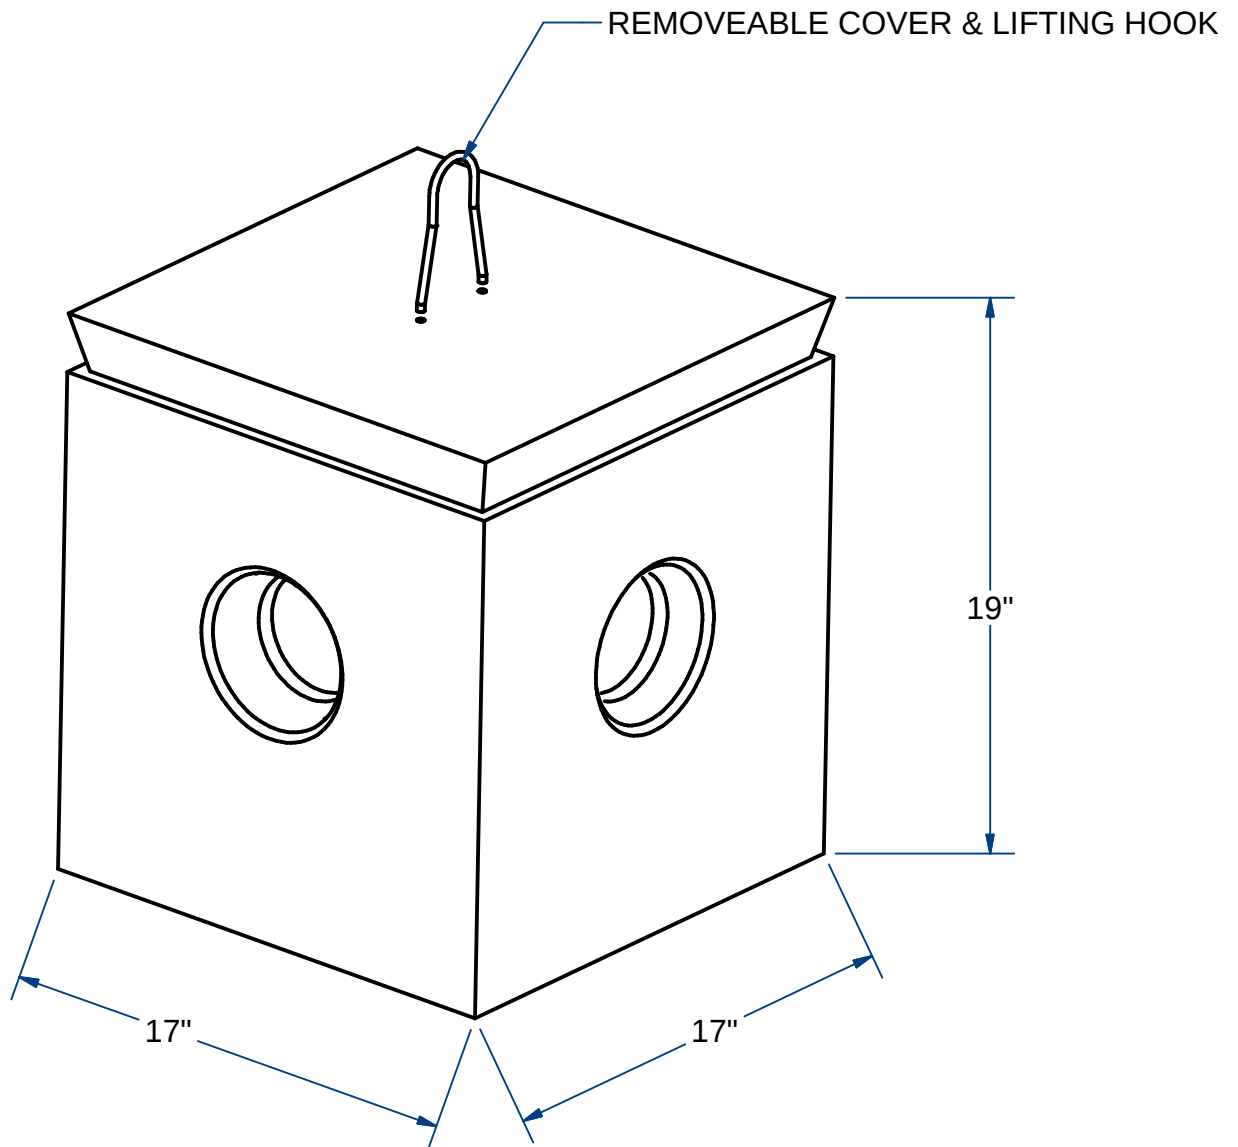

DISTRIBUTION BOX

H10

3 OUTLETS

ITEM# **DB3**

Wt. 260

Lbs

4 -1.1


Sht 1 of 2

ACME-SHOREY

PRECAST CONCRETE PRODUCTS





NOTES:

1.) COMPLIES TO CODE 310 CMR15.232

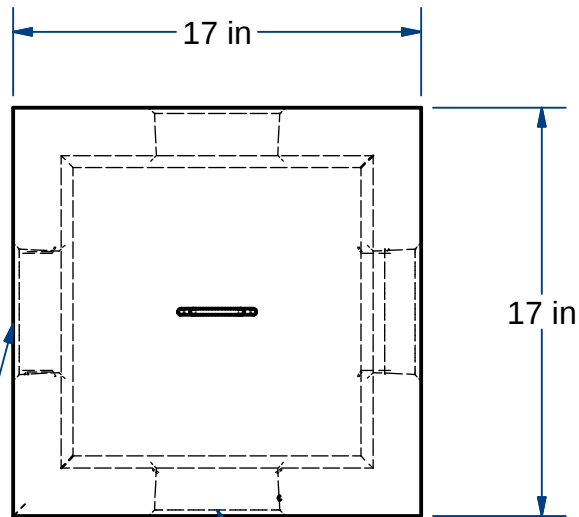

(3) Ø4" INV OUT
'POLYLOK SEAL'

(1) Ø4" INV IN
'POLYLOK SEAL'

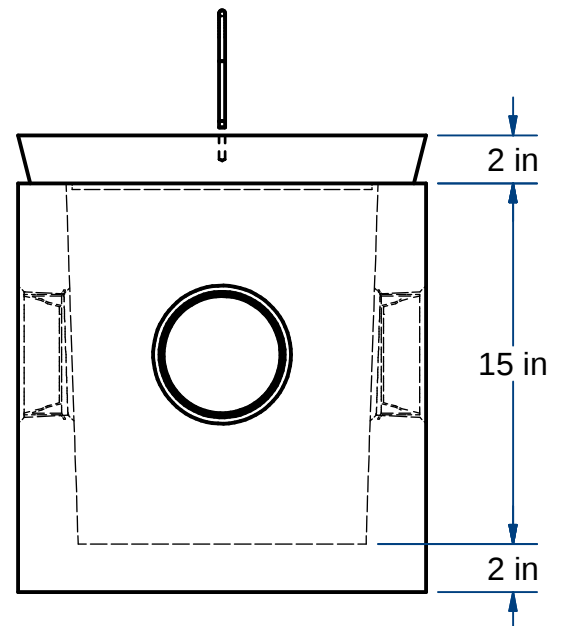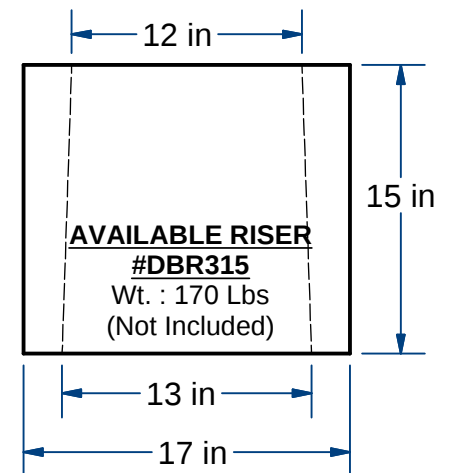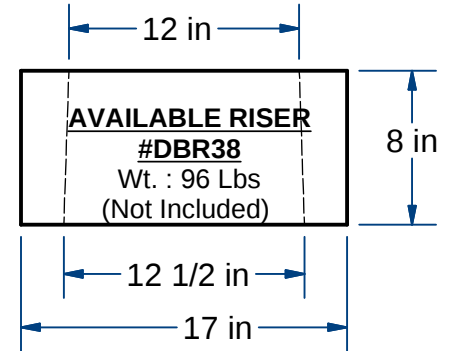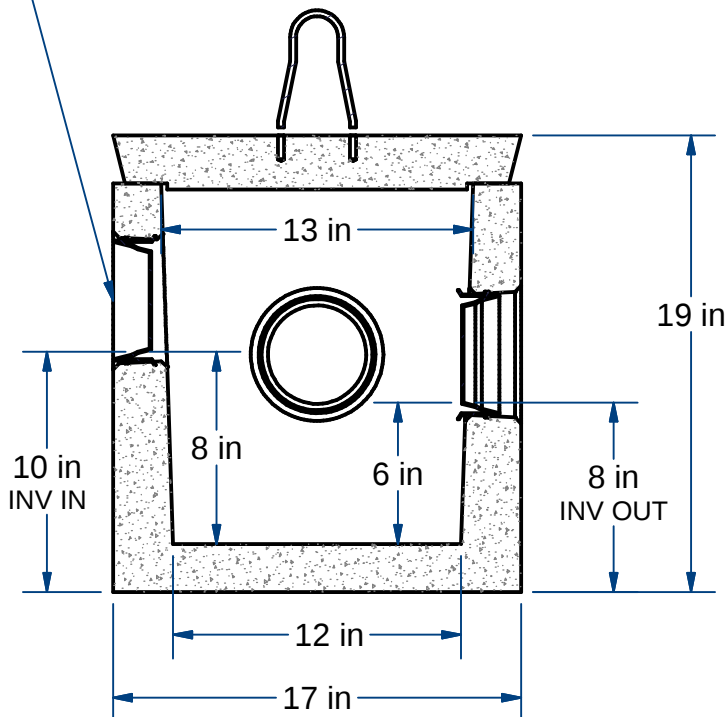

NAME: DISTRIBUTION BOX, 3 OUTLETS

H-10

ITEM# DB3

Concrete Minimum Strength: 4,000 p.s.i. at 28 days
Steel Reinforcement: ASTM A615, Grade 60
Design Loading: standard units - AASHTO - H10

TOP 50
BOTTOM 210

Lbs
Lbs

CH

DATE: 11-21-2019

Ch 4

Pg 1.1

Sht 2 of 2