

# ACME-SHOREY

PRECAST CONCRETE PRODUCTS

WWW.ACMESHOREY.COM

PHONE (508) 548-9607


FAX (508) 548-1664

CARVER, MA  
334 TREMONT STREET

HARWICH, MA  
36 GREAT WESTERN ROAD

## NOTES:

- 1.) Ø4" CONCRETE HUB & BELL CONNECTORS ALLOW FOR P.V.C. PIPE AND ALSO FOR JOINING FLOW DIFFUSOR TO FLOW DIFFUSOR.
- 2.) SHORT SIDE ENTRY.
- 3.) CAPACITY TO INV = 180 Gallons.  
CAPACITY TO TOP INSIDE = 210 Gallons.

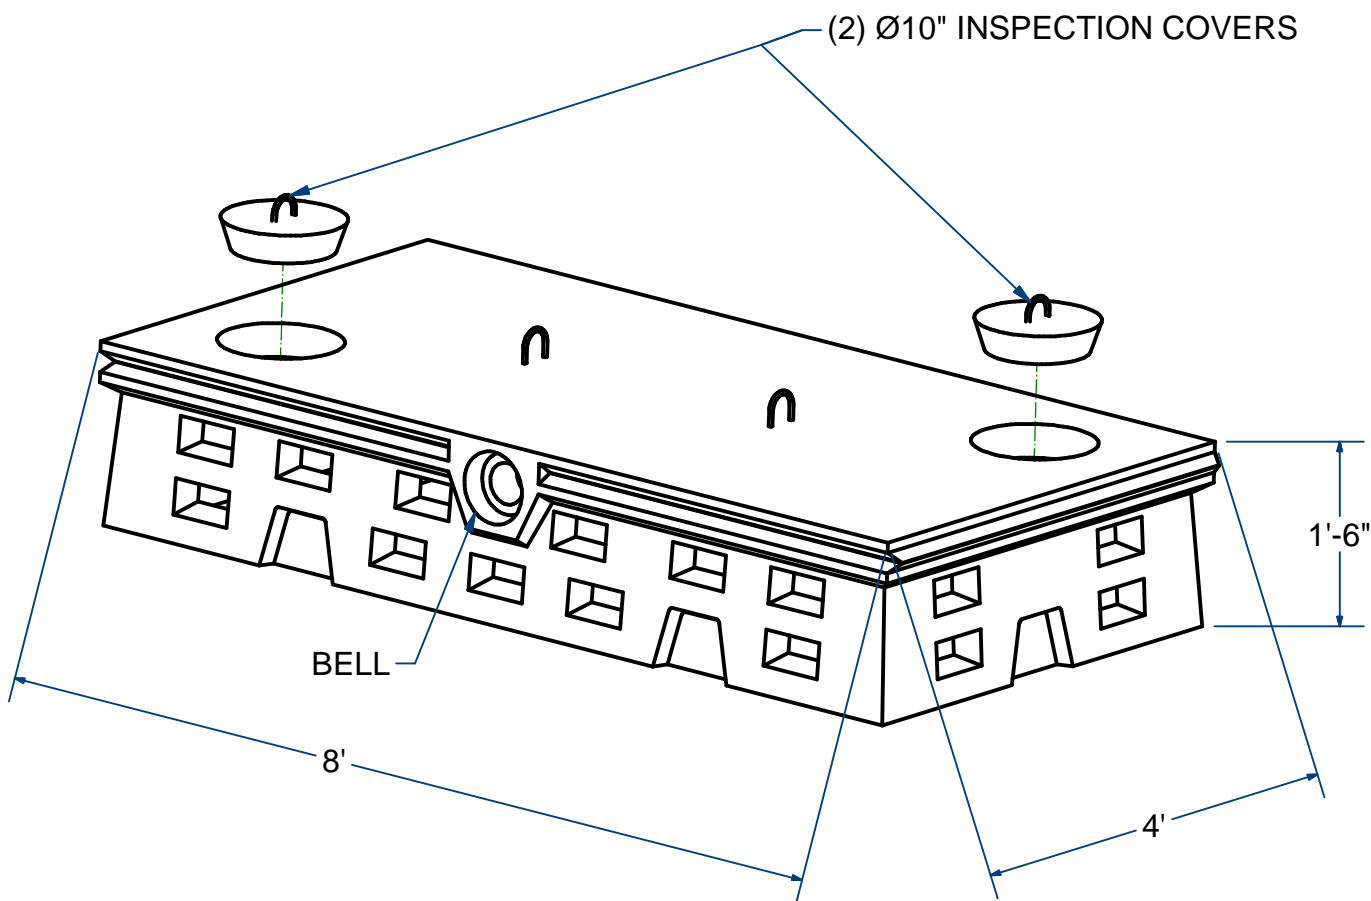

## FLOW DIFFUSOR

H20

'S' MODEL

ITEM# FDS2

Wt. 2,450 Lbs

12-1.4


Sht 1 of 2

# ACME-SHOREY

PRECAST CONCRETE PRODUCTS

**NOTES:**

- 1.) Ø4" CONCRETE HUB & BELL CONNECTORS ALLOW FOR P.V.C. PIPE AND ALSO FOR JOINING FLOW DIFFUSOR TO FLOW DIFFUSOR.
- 2.) SHORT SIDE ENTRY.

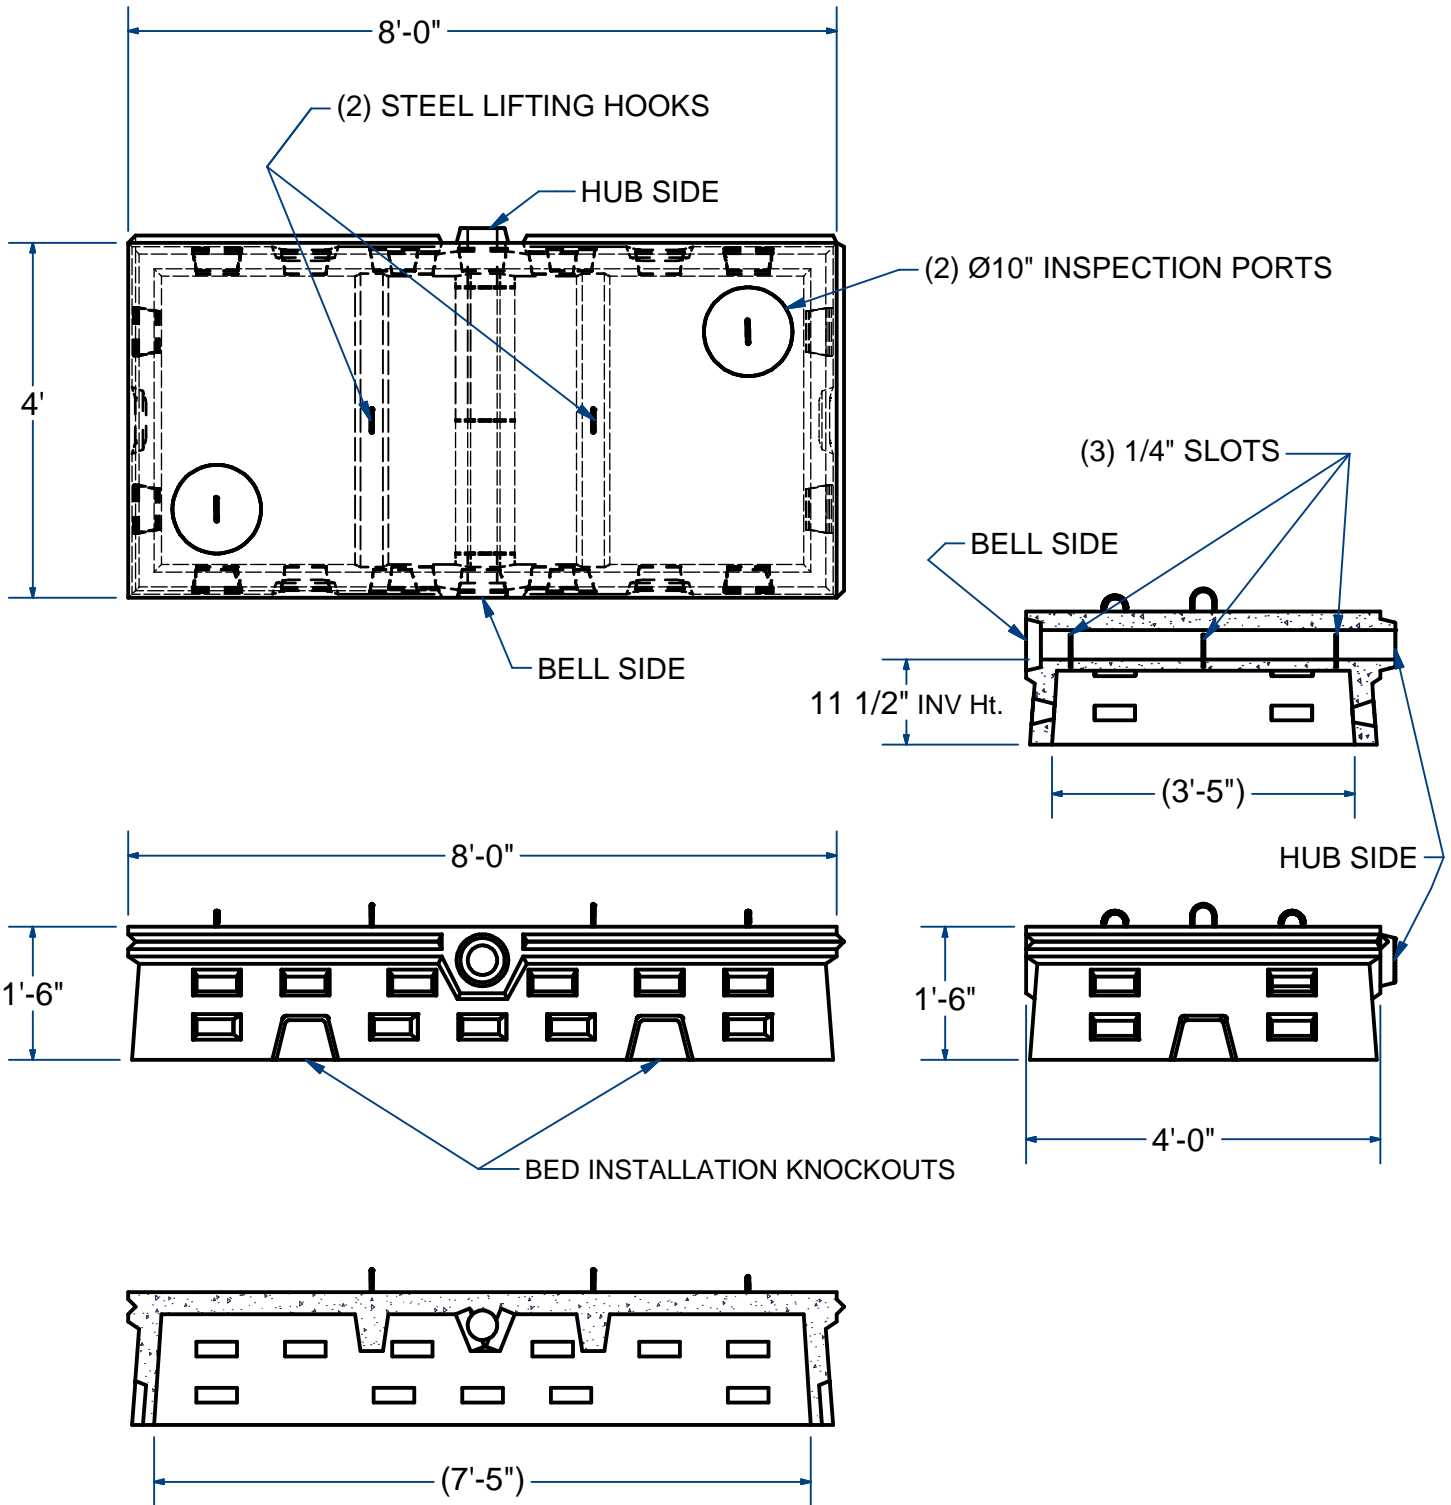

**NAME: FLOW DIFFUSOR, MODEL 'S'**

**H-20**

**ITEM# FDS2**

Concrete Minimum Strength: 5,000 p.s.i. at 28 days  
 Steel Reinforcement: ASTM A615, Grade 60  
 Design Loading: standard units - AASHTO - H20

**WEIGHT 2,450 Lbs**

**C**

**DATE: 3-12-23**

Ch 12 Pg 1.4 Sht 2 of 2