
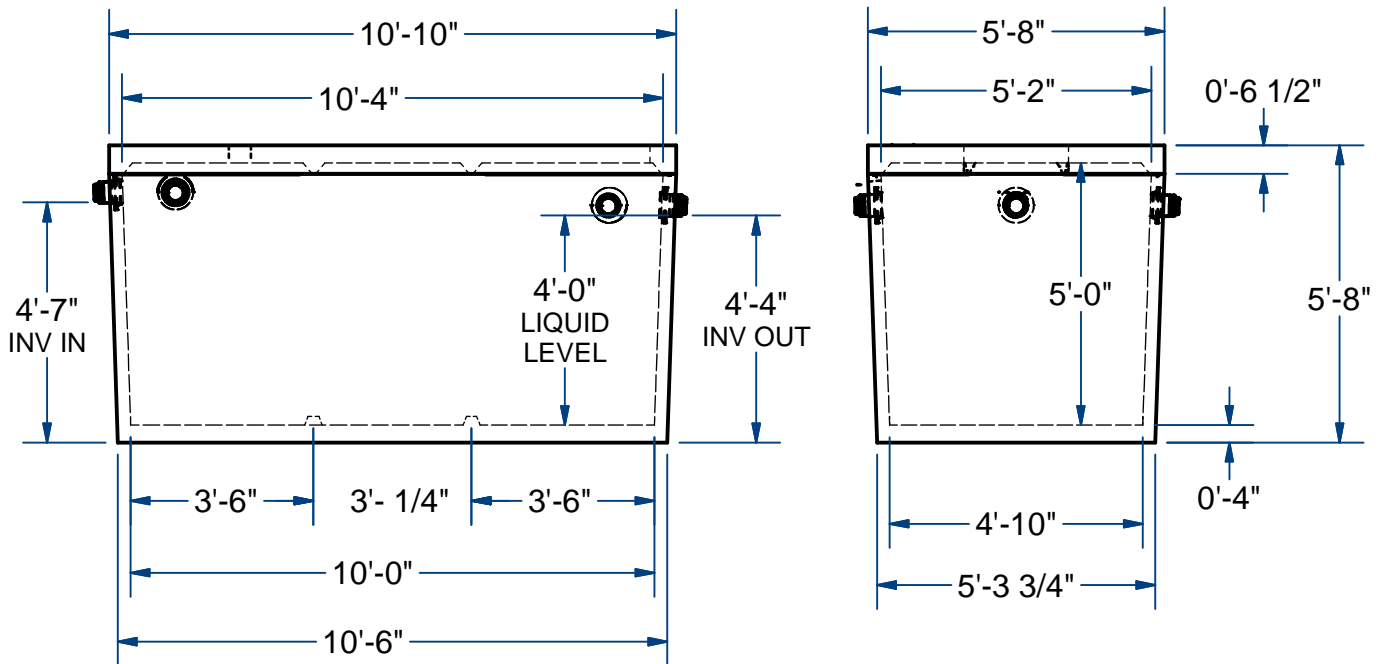


# ACME-SHOREY

PRECAST CONCRETE PRODUCTS

**NOTES:**

1.) SEAM SEALED WITH FLEXIBLE BUTYL RUBBER SEALANT.

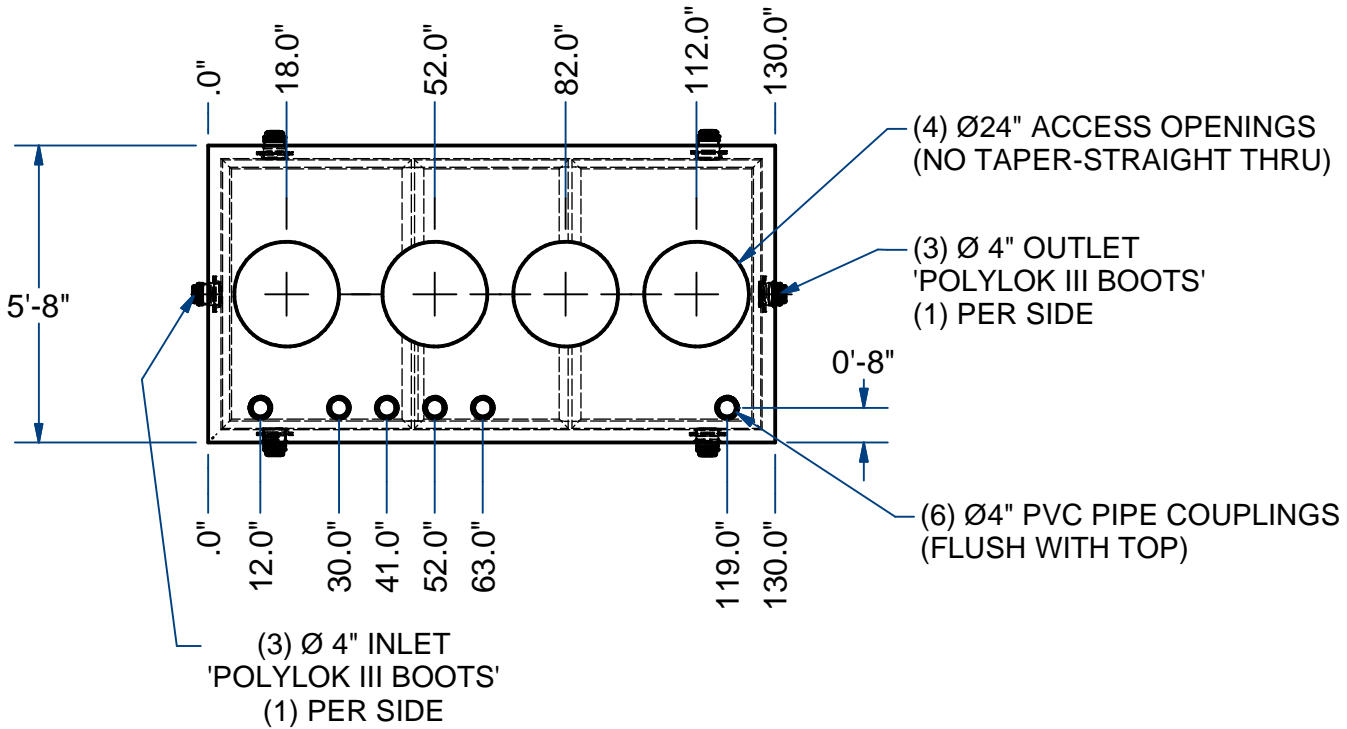

**NAME:** NitROE 2KS TANK ,1500 Gallon, MONO  
(WWTS TANK)

H-10

**ITEM#**  
NitROE2KS-15M

Concrete Minimum Strength: 4,000 p.s.i. at 28 days  
Steel Reinforcement: ASTM A615, Grade 60  
Design Loading: standard units - AASHTO - H10

BASE	9,250
TOP	3,050
	12,300

C

DATE: 10-27-22