


NOTES:

- 1.) SEAM SEALED WITH FLEXIBLE BUTYL RUBBER SEALANT.

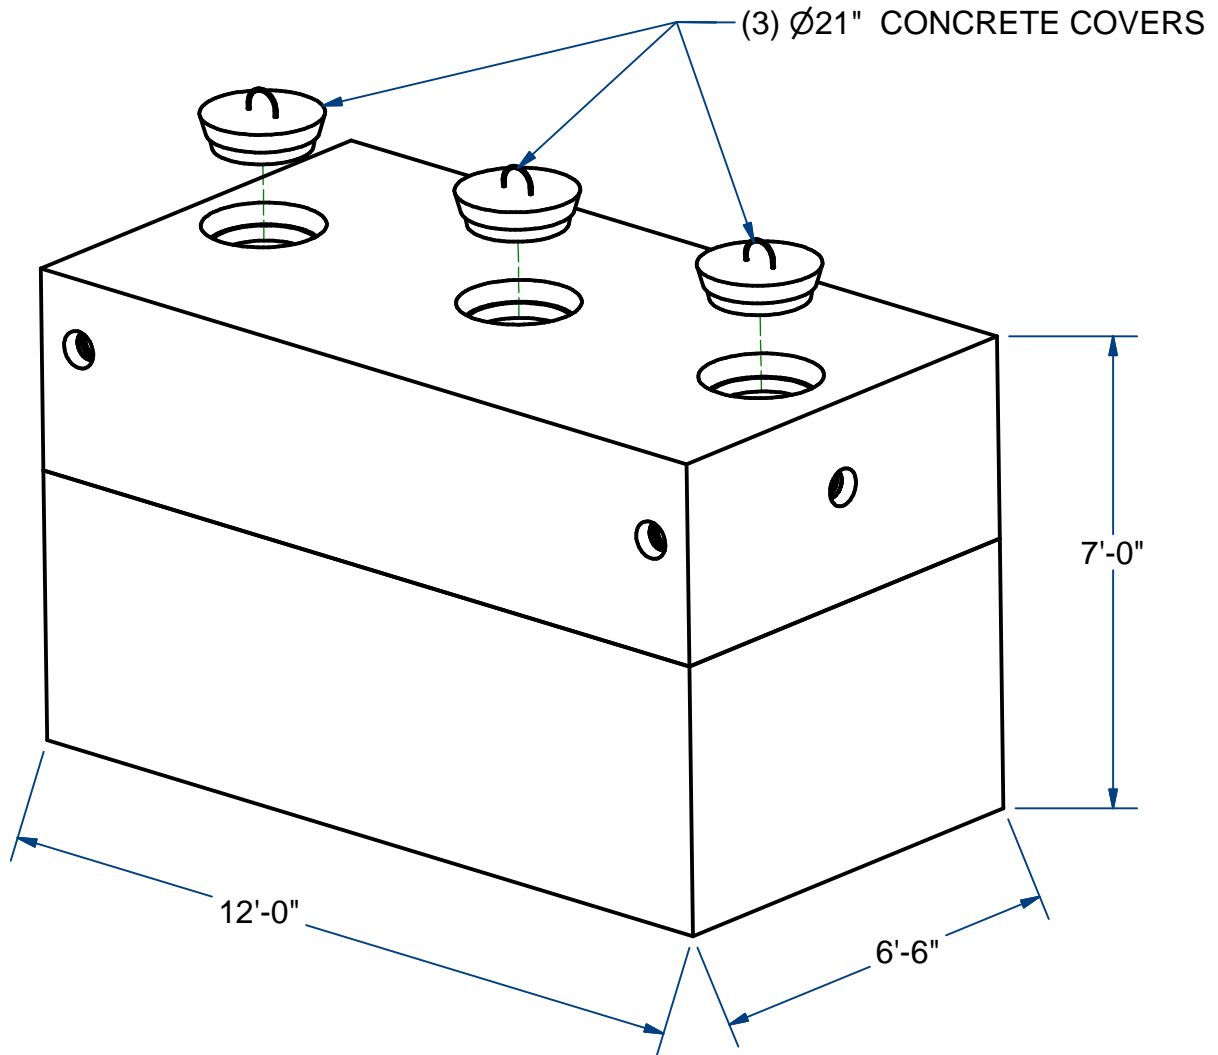

SEPTIC TANK, LOW PROFILE

H10



2,500 GALLON

ACME-SHOREY

PRECAST CONCRETE PRODUCTS

NOTES:

- 1.) SEAM SEALED WITH FLEXIBLE BUTYL RUBBER SEALANT.

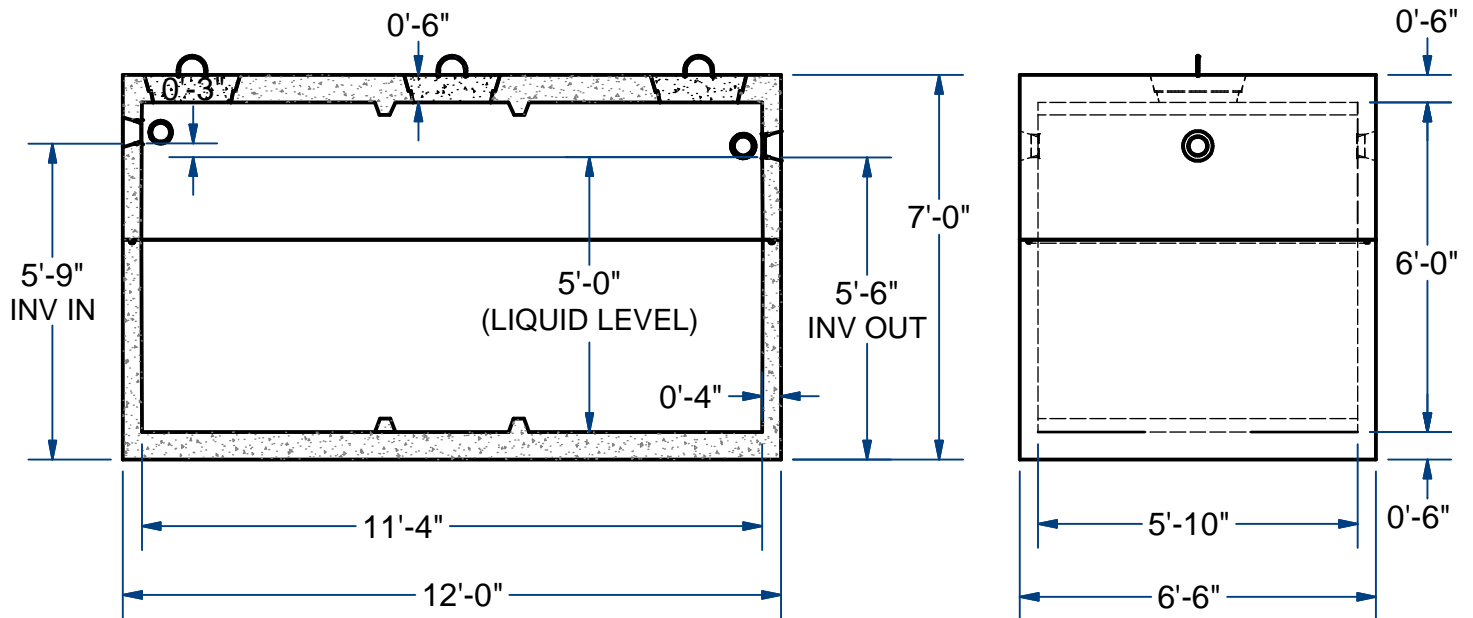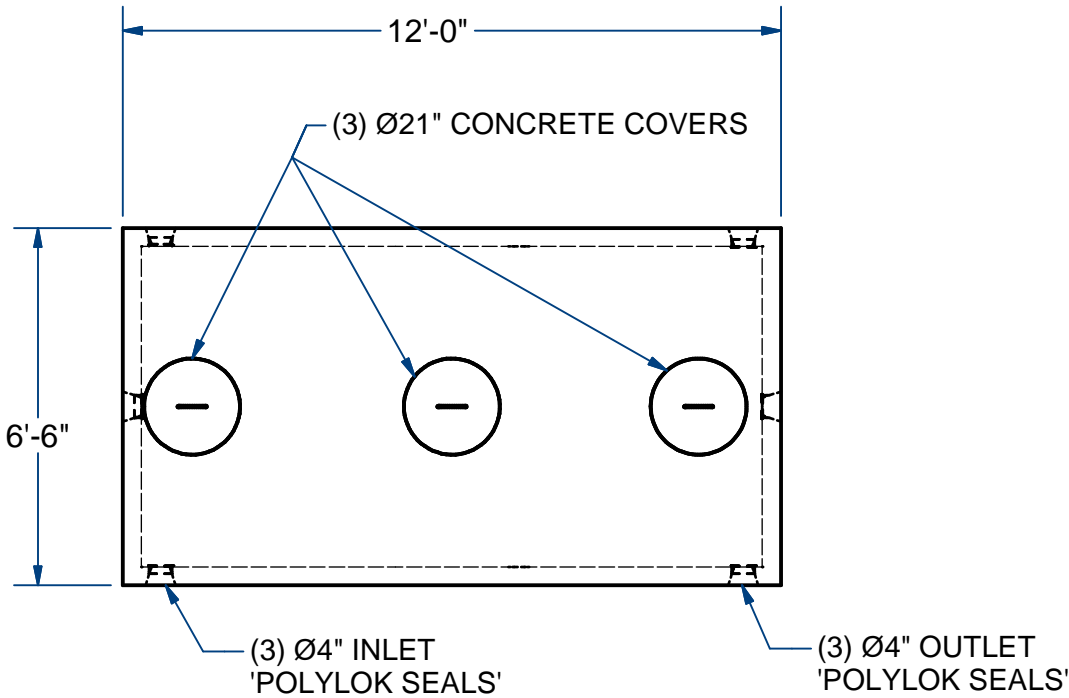

NAME: SEPTIC TANK, 2500Gallon, LOW PROFILE H-10

ITEM# ST25LP

Concrete Minimum Strength: 4,000 p.s.i. at 28 days
 Steel Reinforcement: ASTM A615, Grade 60
 Design Loading: standard units - AASHTO - H10

TOP 10,500 Lbs
 BOTTOM 12,000 Lbs

A

DATE: 6-9-2018