


# ACME-SHOREY


PRECAST CONCRETE PRODUCTS

**NOTES:**


- 1.) CUSTOM BUILT 1500 GALLON TANK BUOYANCY SLAB
- 2.) H10 BUOYANCY SLAB  
**NOT INTENDED FOR H20 LOADING.**
- 3.) CUSTOMERS RESPONSIBILITY TO CONFIRM
  - A.) SLAB OUTER DIMENSIONS
  - B.) COVER LOCATIONS
- 4.) NOT A STOCK ITEM.

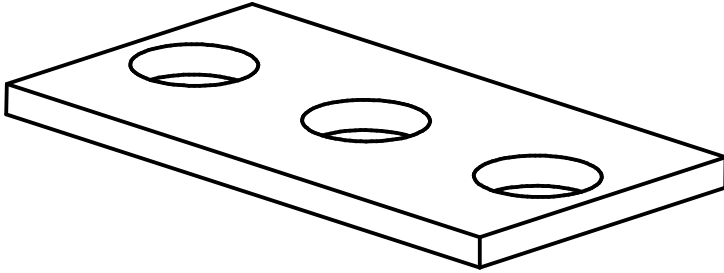

TBS15	Bouyancy Slab
Size	Dim
A (Lgth)	
B (Wdth)	
C (Thickness)	
D (dia) Top Access	
E	
F	
G	
H	
I	
J (QTY) Top Access Holes	

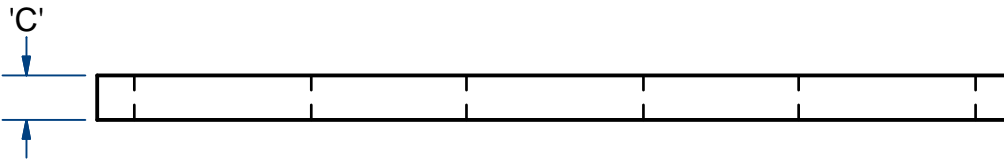

QTY (3) Ø'D" ACCESS OPENINGS (NOTE#3B)

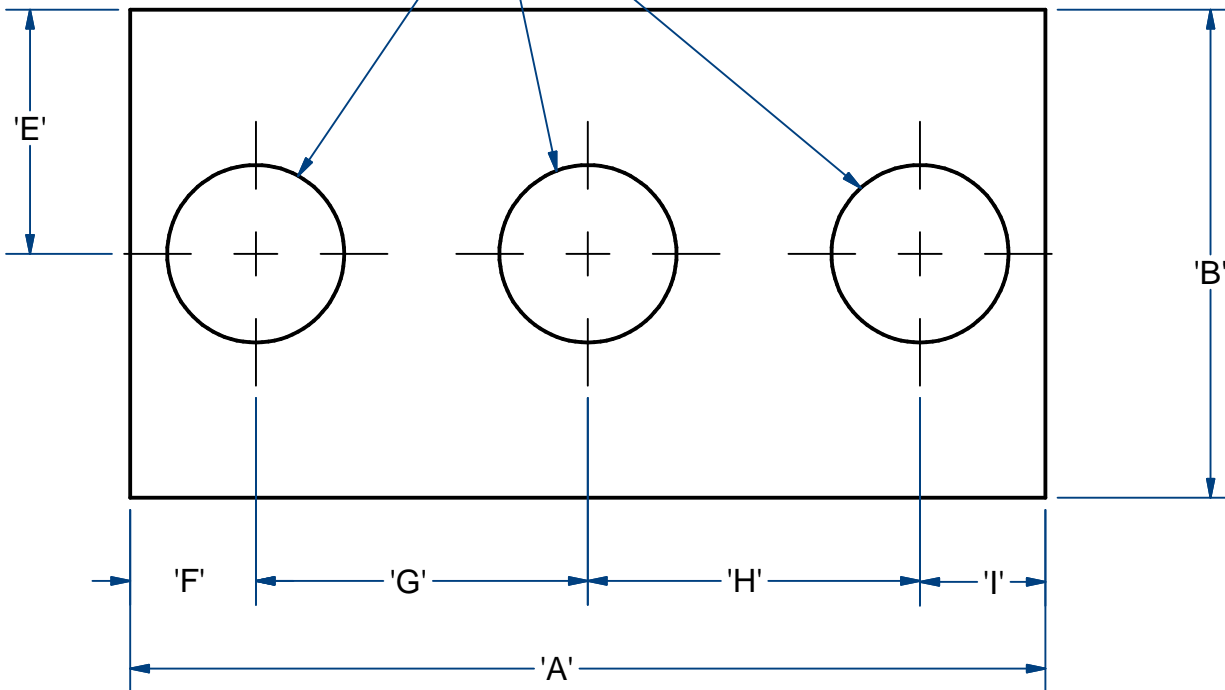

**NAME: TANK BUOYANCY SLAB, 1500g Size, CUSTOM**

**ITEM# TS15**

Concrete Minimum Strength: 4,000 p.s.i. at 28 days  
 Steel Reinforcement: ASTM A615, Grade 60  
 Design Loading: standard units - AASHTO - H10

WEIGHT TBD Lbs

CH

DATE: 2-21-2023